



Specifications

- side mount
- 18.0 mm / 0.71 in.
- dynamic up to 70 kg / 154 lbs.
- solid synthetic rollers
- stainless steel 1.4509 / 441
- 25 °C to +80 °C
-13 °F to +176 °F


Characteristics

- high lateral stability
- ideal running characteristic and smoothness of running through integrated progressive action
- integrated safety clip
- dual-sided captive profile
- synthetic stop
- self-closing
- compatible with regular extension drawer slide FR 1052 SCC
- available as heat-resistant version up to +110 °C (+230 °F)
- Easy Close Device (ECD) can be ordered optionally

Mounting Type

- cabinet and drawer profile with screw holes

Dimensions

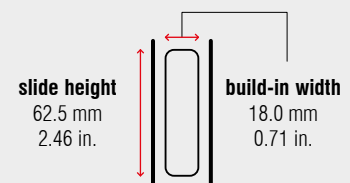

Length		Extension		Weight		Item No.	Item No.
				per set		PU 1	PU 2
mm	inch	mm	inch	kg	lbs.		
300	11.81	285	11.22	1.33	2.93	▶ 70320	▶ 70320GV
350	13.78	335	13.19	1.49	3.28	▶ 70321	▶ 70321GV
400	15.75	385	15.16	1.67	3.68	▶ 70322	▶ 70322GV
450	17.72	435	17.13	1.92	4.23	▶ 70323	▶ 70323GV
500	19.69	485	19.09	2.15	4.73	▶ 70324	▶ 70324GV
550	21.65	535	21.06	2.37	5.23	▶ 70325	▶ 70325GV
600	23.62	585	23.03	2.61	5.75	▶ 70326	▶ 70326GV
650	25.59	635	25.00	2.85	6.29	▶ 70327	▶ 70327GV
700	27.56	685	26.97	3.08	6.80	▶ 70328	▶ 70328GV
750	29.53	735	28.94	3.33	7.33	▶ 70329	▶ 70329GV

Packing Unit

PU 1 – Sets assembled per Box, all Lengths: 5

PU 2 – 50 Sets, all 6 profiles individually packaged, 10 boxes

(4 x 25 cabinet profiles LEFT/RIGHT, 4 x 25 middle profiles LEFT/RIGHT, 2 x 50 drawer profiles LEFT/RIGHT)

▶ in stock