






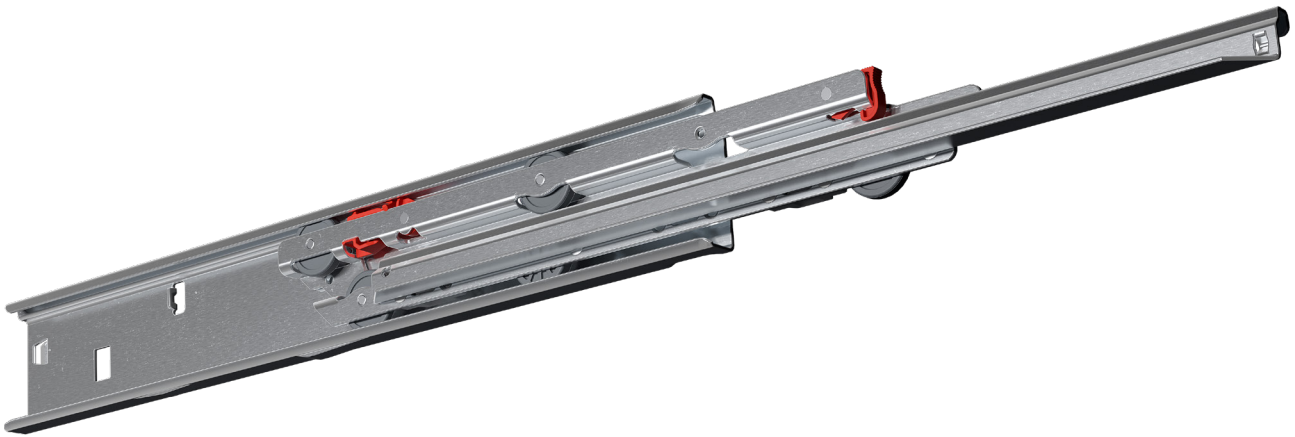

FR 796 SCC SMT

Full Extension Progressive Action Drawer Slide



Specifications

-  bottom mount
-  18.0 mm / 0.71 in.
-  dynamic up to 70 kg / 154 lbs.
-  solid synthetic rollers
-  stainless steel 1.4509 / 441
-  -25 °C to +80 °C
-13 °F to +176 °F


Characteristics

- high lateral stability
- integrated safety clip
- dual-sided captive profile
- synthetic stop
- self-closing
- compatible with regular extension drawer slide FR 1052 SCC SMT
- available as heat-resistant version up to +110 °C (+230 °F)
- Easy Close Device (ECD) can be ordered optionally

Mounting Type

- cabinet profile with bayonet mounting tabs and safety nose
- drawer profile without screw holes
- tool-less quick assembly of the cabinet profile

Dimensions



Length		Extension		Weight		Item No.	Item No.
				per set		PU 1	PU 2
mm	inch	mm	inch	kg	lbs.		
300	11.81	285	11.22	1.48	3.27	70600	70600GV
350	13.78	335	13.19	1.57	3.47	70601	70601GV
400	15.75	385	15.16	1.83	4.03	70602	70602GV
450	17.72	435	17.13	2.08	4.59	70603	70603GV
500	19.69	485	19.09	2.32	5.12	70604	70604GV
550	21.65	535	21.06	2.58	5.68	70605	70605GV
600	23.62	585	23.03	2.84	6.25	70606	70606GV
650	25.59	635	25.00	3.09	6.81	70607	70607GV
700	27.56	685	26.97	3.35	7.37	70608	70608GV
750	29.53	735	28.94	3.62	7.98	70609	70609GV

Packing Unit

PU 1 – Sets assembled per Box, all Lengths: 5

PU 2 – 50 Sets, all 6 profiles individually packaged, 10 boxes

(4 x 25 cabinet profiles LEFT/RIGHT, 4 x 25 middle profiles LEFT/RIGHT, 2 x 50 drawer profiles LEFT/RIGHT)